

ChowCAM

DOME - 1



User Manual



www.tmt-automation.com

Index


Product overview	P2
Kit contents	P3
Specifications	P3
General installation	P4
Apply for a new Chow! account	P5
Connecting ChowCAM to Chow! App	P6
Operation page	P8
Owner shares the ChowCAM to other users	P9
Push notification	P10
LED LIGHT STATUS	P11
FAQ	P11



Introduction of the ChowCAM

DOME1 is a device which can be integrated with Chow! App and Chow's devices. DOME1 will provide a live view of the site which allows you to check the environment before operation. With a micro SD card, DOME1 can record each operation and movement for future review.

Product Overview

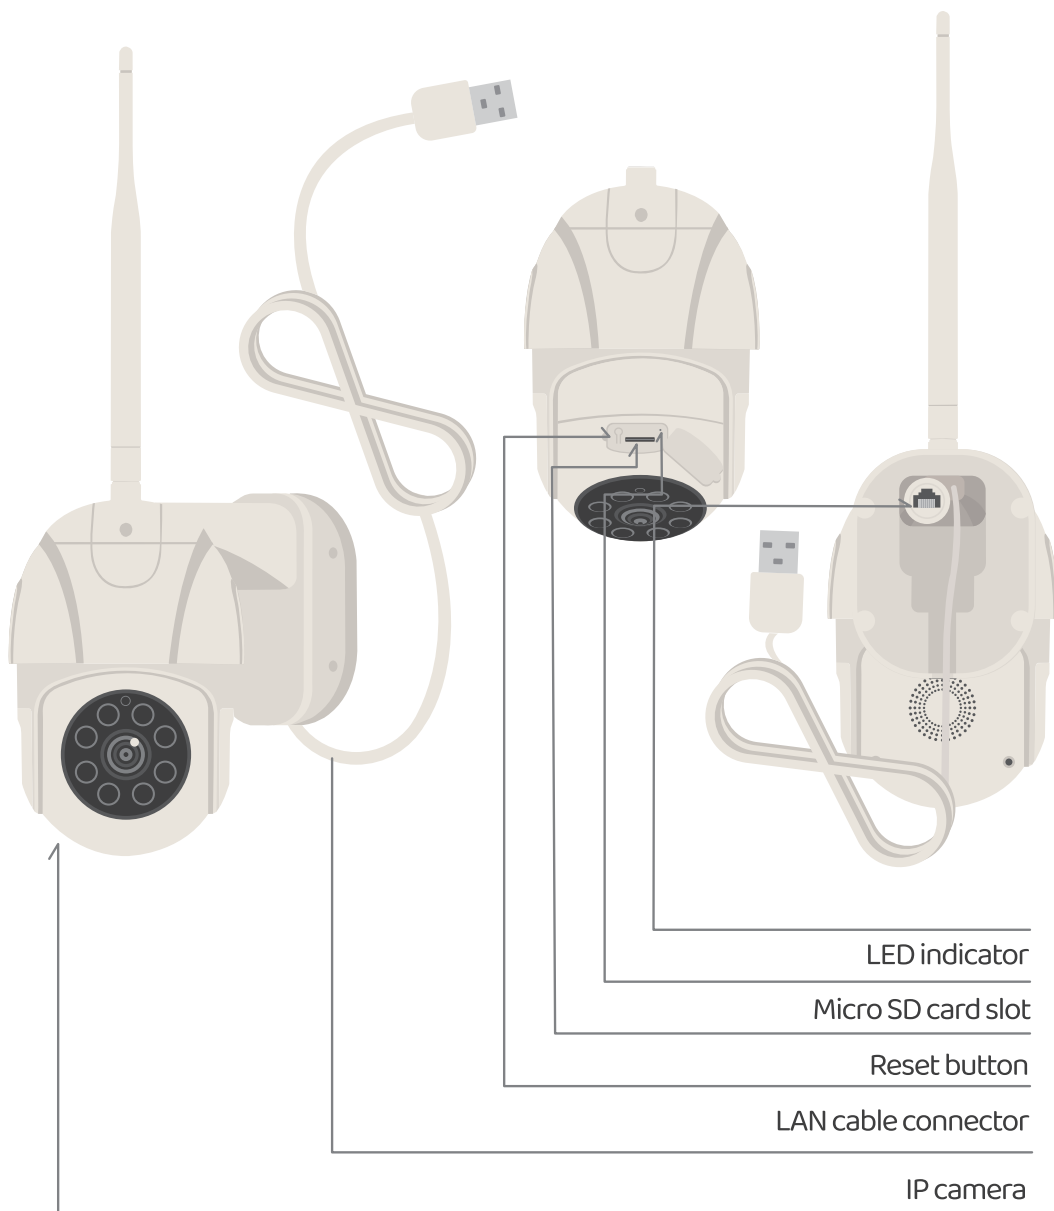


WARNING

Safety Instructions

Please read this manual carefully before installation. TMT Automation Inc. is not responsible for improper installation and failure to comply with local electrical and building regulations. Please keep all the components of the ChowCAM and this manual for further consultation.

Kit contents

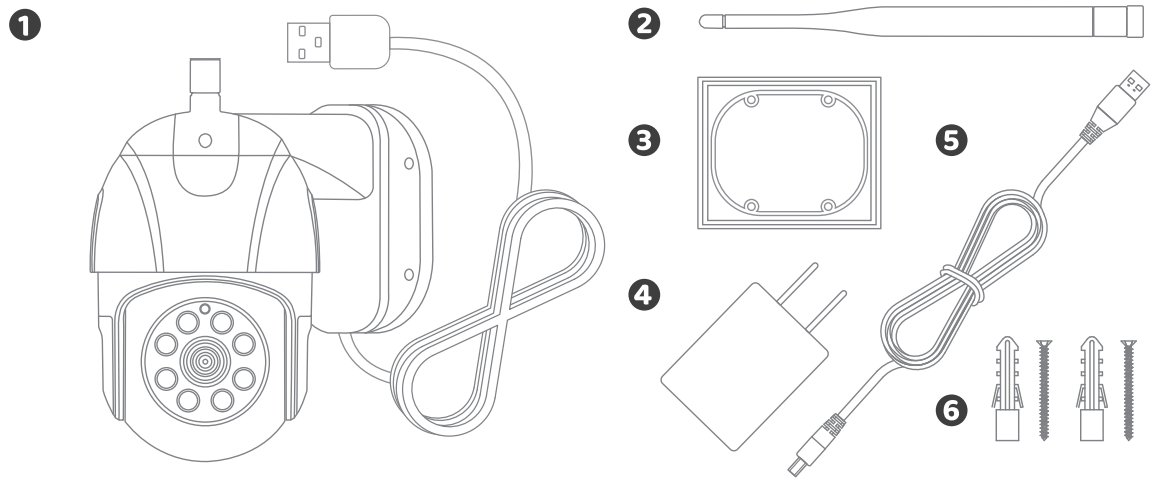


- 1 DOME1
- 2 Antenna
- 3 Adaptor
- 4 Power plug
- 5 LAN Cable
- 6 Anchors with screws kit


Specifications

Video resolution	Full HD 1080P
Compression	H.264
Frame rate	1920x1080@15fps
Field of view	120 Degree
Day/night mode	ICR with IR LED
Connectivity	802.11b/g/n@2.4GH
Etherne	10/100Mbps
Alarm	Motion Detection
Storage	Micro SD Card 128GB (SD Card Not Include)
Waterproof	IP66
Operating temperature	-10°C - 50°C
Power	Power Adapter DC 5V/1A


General Installation

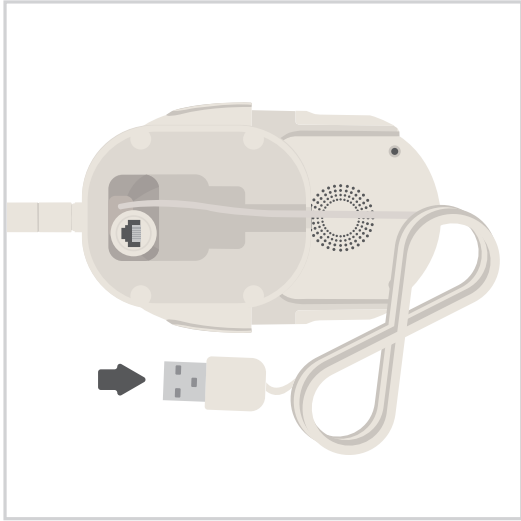

❶ Connect the antenna to DOME-1

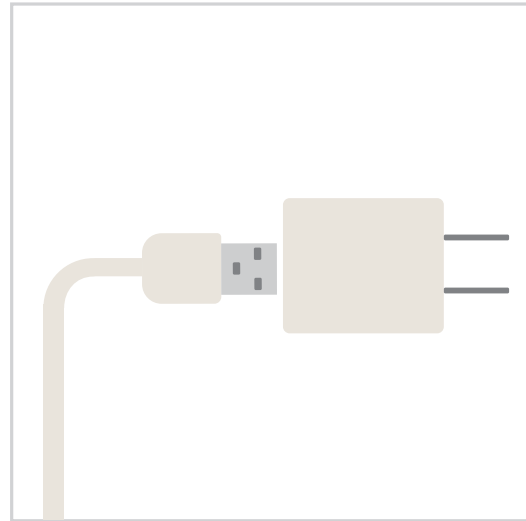

❷ Connect the power wire with the adaptor

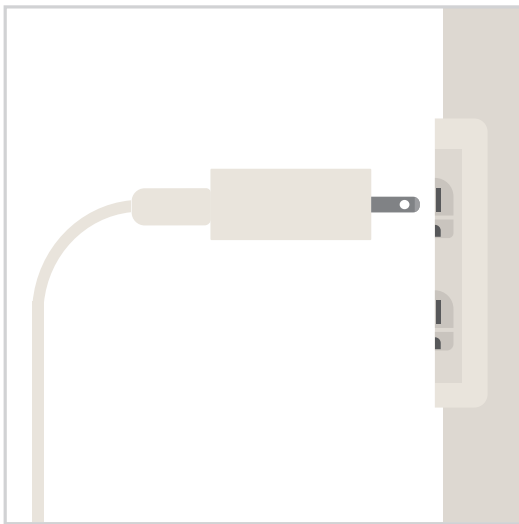

❸ Connect the adaptor to the socket

Apply for a new Chow! account

1. Please scan the QR code and download the Chow! App
2. Press sign up icon and press the agree icon to continue
3. Please type the following information for registration:



- a. Email (enter twice for verification)
- b. Password (enter twice for verification)
- c. The password should have at least 1 English character and at least 8 characters in total

4. The system will send a link to your email when the registration succeeded.
5. Please go to your email, and click the link to activate your Chow! account.
6. Please log in to your Chow! account.




Connect DOME 1 to Chow! App

Step 1 Add a new ChowCam-DOME 1

Tap the (+) icon to add a new device

New device -> Accessories -> ChowCam-DOME1

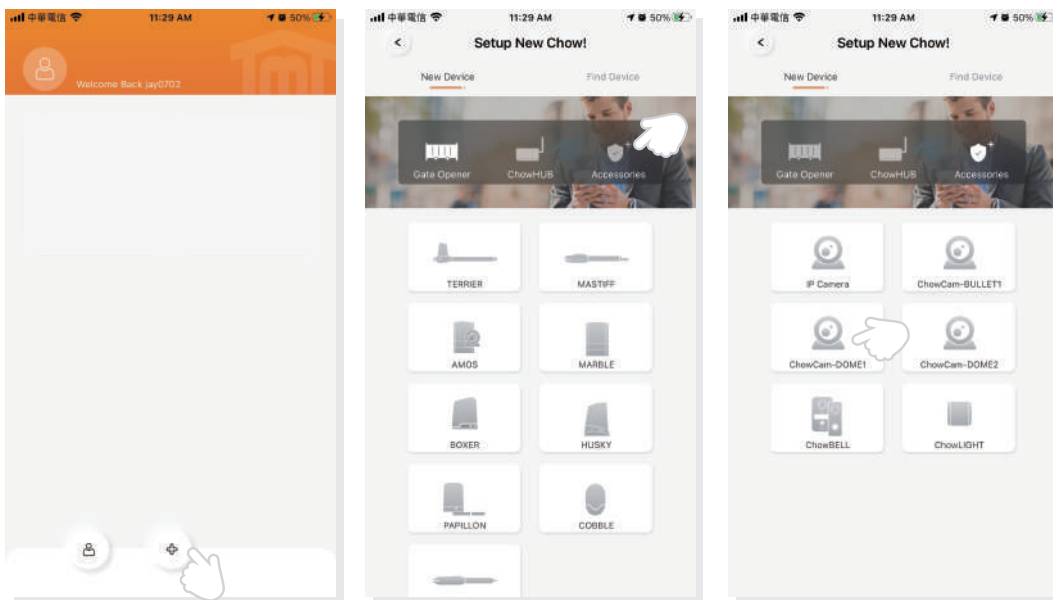


Tap the (Scan QR code) icon

Follow the indications as below:

Step 1 – Power the device


Step 2 – Reset the device

Step 3 – ChowCam-DOME1 sound once when it has been reset

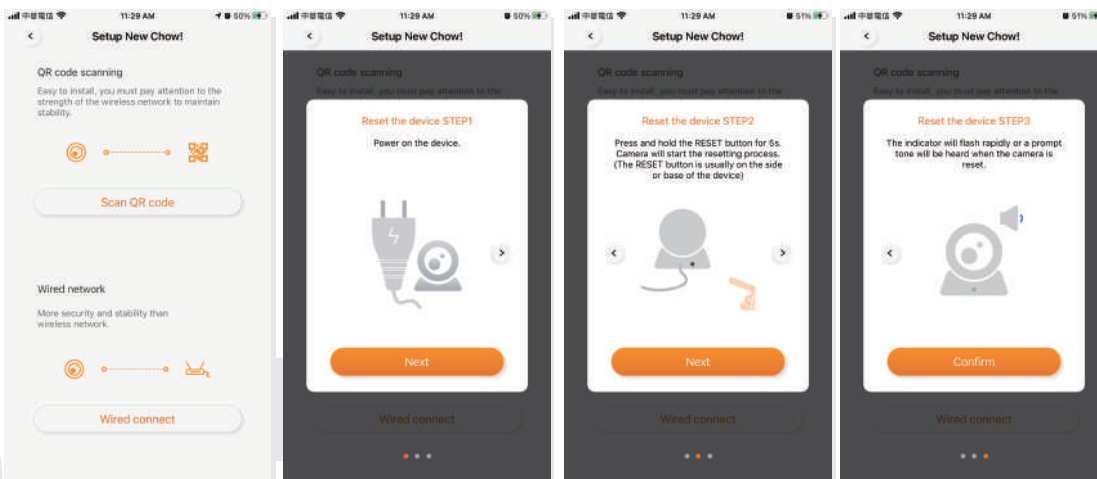


Step 2 Connect ChowCam-DOME 1

Entering the correct password for the Wi-Fi network and press set
Scan the QR code in front of the camera until it sounds once
The system starts connecting to Wi-Fi network.

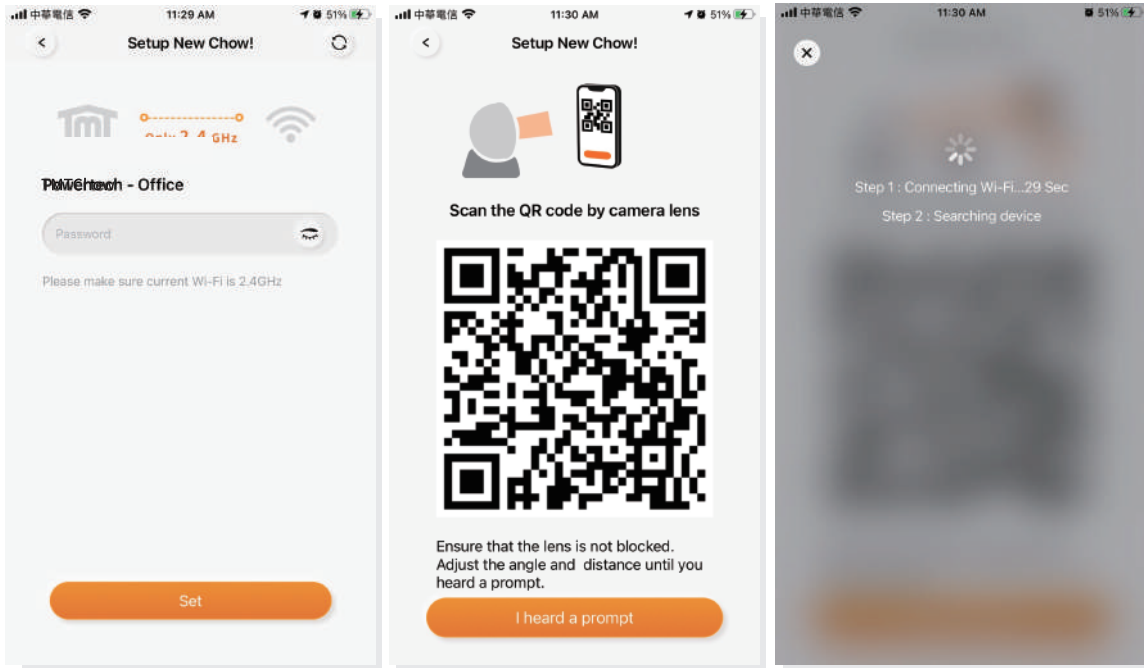


Step 3 Setting

Set the name of your camera
Tap the icon of the Camera to enter the operation page.

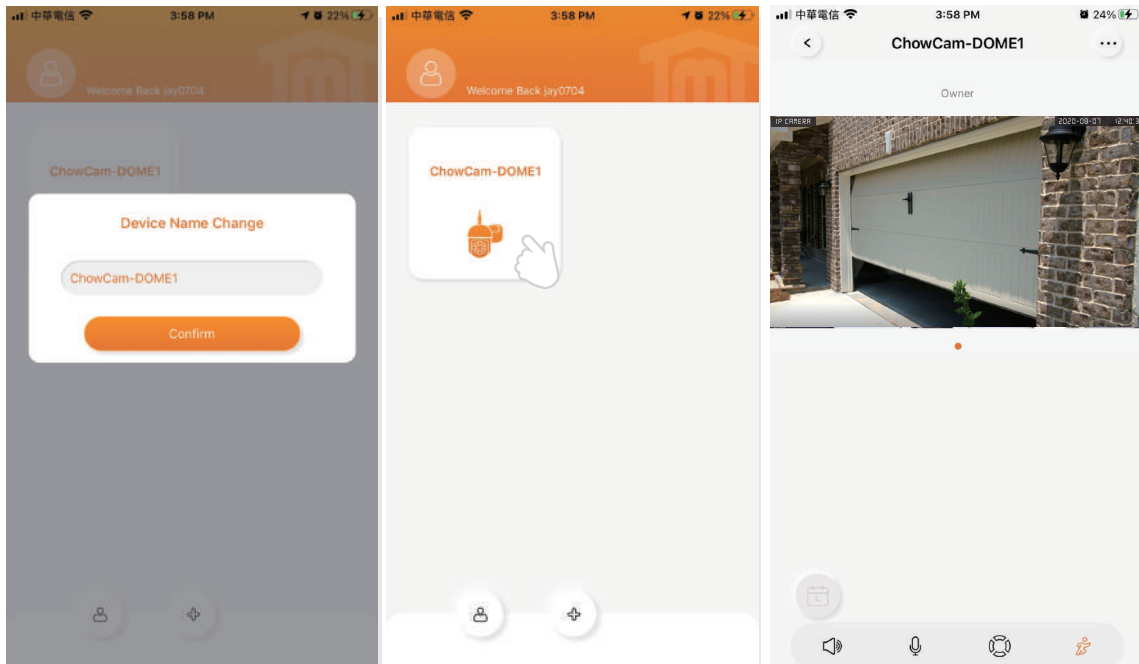


Operation page

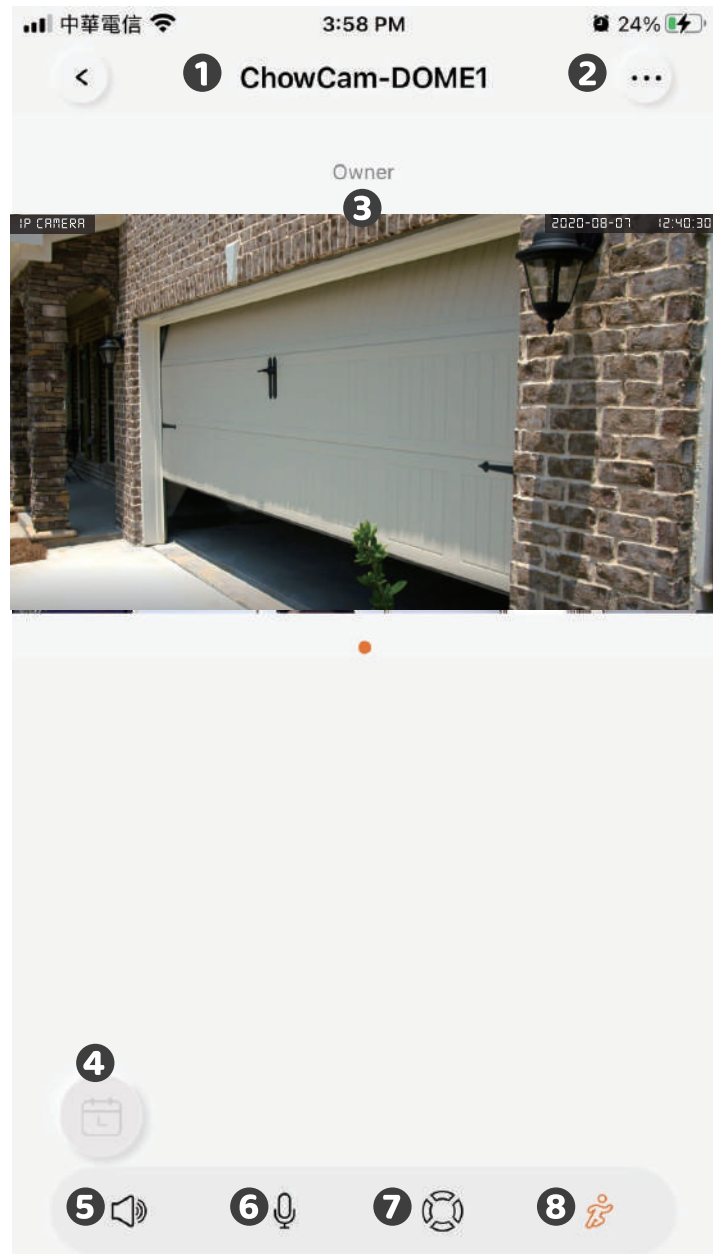

- 1 Name of the device
- 2 Setting
- 3 Owner/Manager/User
- 4 Recorded Video (only with Micro SD card)
- 5 Speaker
- 6 Mic
- 7 Rotation
- 8 Motion detection

Owner shares the ChowCAM to other users


- 1 Press the icon on the corner to enter the account management page.
 - 2 Tap the manage shared device.
 - 3 Enter the account which you are going to share.
 - 4 Choose the device you are going to share and tap next.
- a. The Owner can decide the permission of device sharing.
A manager can share and operate this device, but a normal user can only operate it.
- b. One ChowCAM can only be shared to 10 users.

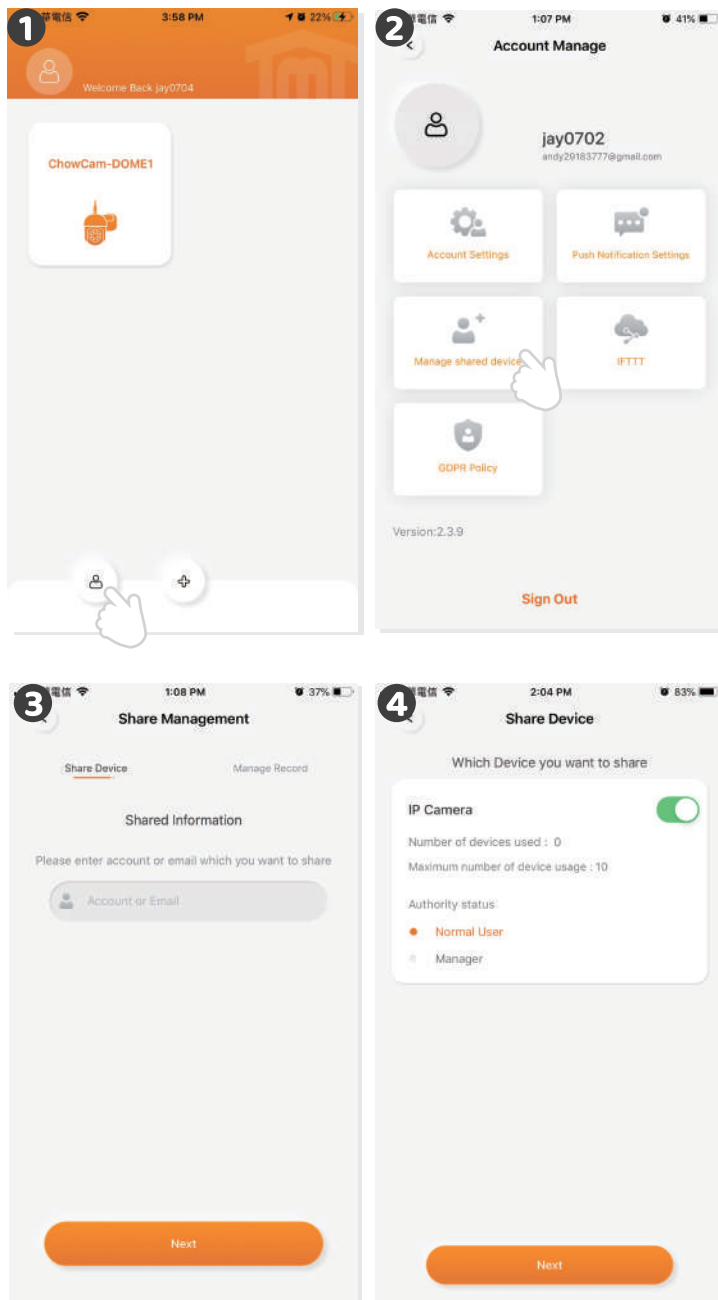

Push notification

- 1 Press the icon on the corner to enter the account management page.
- 2 Tap the push notification setting.
- 3 Turn **ON** the switches of the notification.

*****Please go to the settings page of your smartphone,
Find TMT Chow! and allow the notifications*****

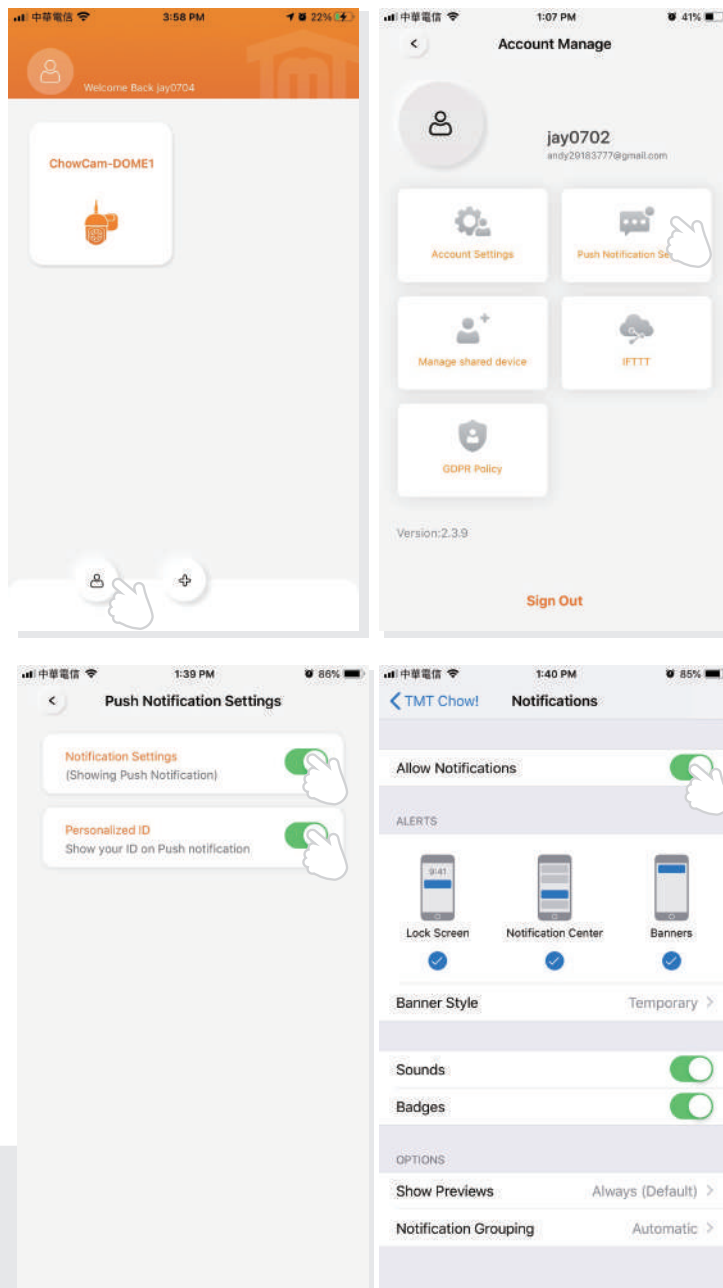

LED LIGHT STATUS

LIGHT STATUS	CAMERA STATUS
Red light on	Camera is powered on
Red and blue light alternately flashing	Waiting to connect now
Blue light flashing	Camera is connecting Wi-Fi
Blue light solid	Succeeded to connect Wi-Fi
Red light quickly flashing	1. Reset camera to factory setting 2. Camera is upgrading firmware

FAQ

Question 1

How to reset DOME 1 to default setting?

Answer 1

1. Delete the DOME 1 on the Chow! App by sliding the DOME 1 icon and press the delete icon.
2. Press the reset button for 10 seconds until DOME 1.



Question 2

Can not see the view after DOME 1 has already completed the Wi-Fi connection.

Answer 2

1. Make sure your Wi-Fi is functional.
2. Un-plug and reconnect the power plug of DOME 1.
3. Check if you enter the PIN code at the device page.

